

100pcs 3:1 transparent adhesive lined Heat shrink tube-assortment

Item No.: 1810CA006

This range is particularly suitable for hobbyists, craftsmen, field service, service workshops, electronics and the laboratory needs.


100 pieces of shrinking ratio 3:1 standard shrinking tube for a range of application diameter from 1.6 to 12.7 mm.

Hot-melt adhesive lined tubing in the transparent color.

The heat-shrink tubing can be used for insulation, protective covering of components, as anti-kink protection, protection against corrosion, as well as repair of cables and lines, and much more be used.



| | |
|------------------------------|-----------------------------|
| Shrinking ratio | 3 : 1 |
| Material | PE |
| Shrinking temperature | 70°C - 125°C |
| Operation temperature | -40°C - 125°C |
| Flammability | VW-1 |
| Tensile strength | ≥ 10.4Mpa |
| Elongation at break | ≥ 300% |
| Rated voltage | 600V |
| Diselectric strength | ≥ 1.5kv/mm at 30sec. |
| Volume resistivity | ≥ 10¹⁴Ω |

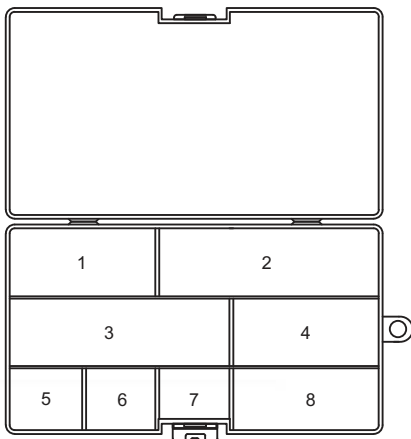

set contents

| Section | Heat shrink tube | | Length | pcs |
|---------|------------------|----------------|--------|-----|
| | Inner diameter ø | after shrink ø | | |
| 1 | 7.9 mm | 2.7 mm | 65 mm | 5 |
| 2 | 12.7 mm | 4.2 mm | 95 mm | 3 |
| 3 | 9.5 mm | 3.2 mm | 95 mm | 4 |
| 4 | 6.4 mm | 2.2 mm | 65 mm | 8 |
| 5 | 1.6 mm | 0.5 mm | 32 mm | 25 |
| 6 | 2.4 mm | 0.8 mm | 32 mm | 20 |
| 7 | 3.2 mm | 1.0 mm | 32 mm | 20 |
| 8 | 4.8 mm | 1.6 mm | 65 mm | 15 |