

Specification for BT HQ 21605AV-YETF-LED04-I2C-5V

Version Juni 2003

DOCUMENT REVISION HISTORY 1:

DOCUMENT REVISION FROM TO	DATE	DESCRIPTION	CHANGED BY	CHECKED BY
A	2003.05.23	First release.	SUNNY LEE	WONG MAN CHARM

CONTENTS

	<u>Page No.</u>
1. GENERAL DESCRIPTION	4
2. MECHANICAL SPECIFICATIONS	4
3. INTERFACE SIGNALS	7
4. ABSOLUTE MAXIMUM RATINGS	7
4.1 ELECTRICAL MAXIMUM RATINGS (Ta=25°C)	7
4.2 ENVIRONMENTAL CONDITION	7
5. ELECTRICAL SPECIFICATIONS	8
5.1 TYPICAL ELECTRICAL CHARACTERISTICS	8
5.2 TIMING SPECIFICATIONS	9
6. CHARACTER SET 'R' IN CGROM	11

**Specification
of
LCD Module Type
Model No.: BTHQ 21605AV-02**

1. General Description

- ∩ 16 characters (5x 8 dots) x 2 lines STN Positive Yellow Transflective LCD Character module.
- ∩ Driving scheme: 1:18 multiplexed drive, 1/4 bias.
- ∩ Optimal view direction: 6 O'clock.
- ∩ Driving IC: 'PHILIPS' PCF2119RU/F2/026 (Die form) LCD controller/driver or equivalent.
- ∩ Data interface: I²C-bus.
- ∩ Yellow – green LED04 backlight.

2. Mechanical Specifications

The mechanical detail is shown in Fig. 1(b) and summarized in Table 1 below.

Table 1

Parameter	Specifications	Unit
Outline dimensions	84.0(W) x 44.0(H) x 14.0 MAX.(D)	mm
Active area	61.0(W) x 15.8(H)	mm
Display format	16 characters (5x 8 dots) x 2 lines	-
Character size	2.95(W) x 5.553(H)	mm
Character spacing	0.60(W) x 0.394(H)	mm
Character pitch	3.55(W) x 5.947(H)	mm
Dot size	0.578(W) x 0.681(H)	mm
Dot spacing	0.015(W) x 0.015(H)	mm
Dot pitch	0.593(W) x 0.696(H)	mm
Weight	Approx. 42.0	grams

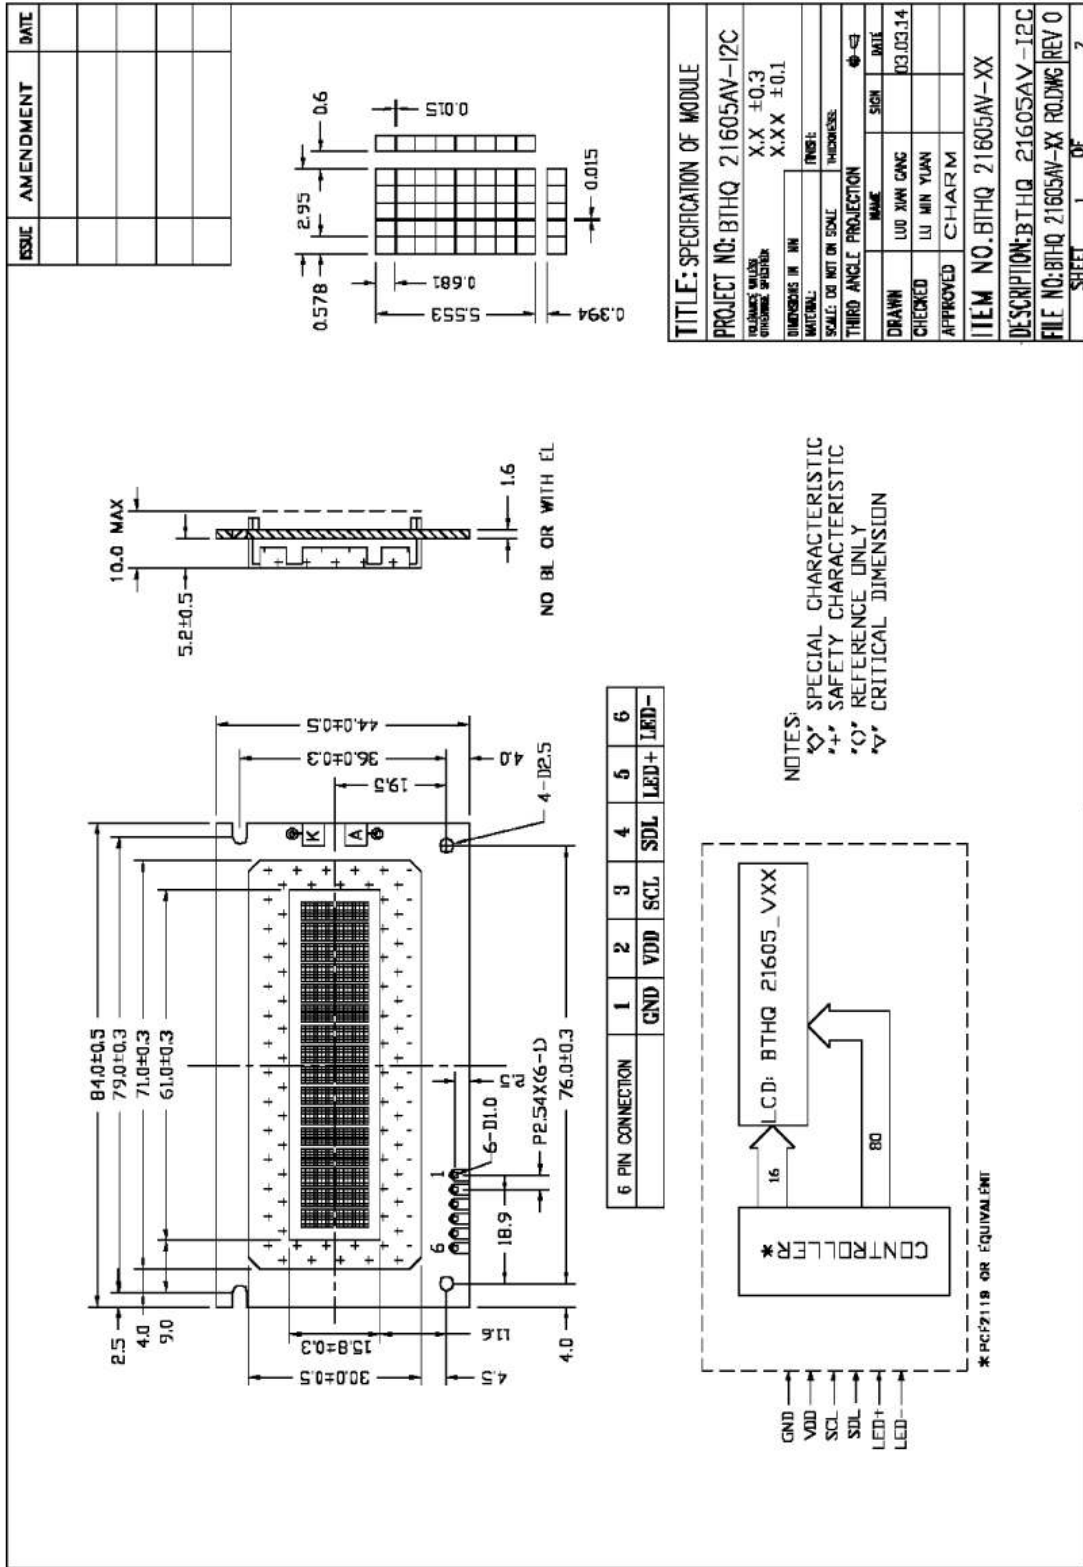


Figure 1(a): Specification Drawing with No BL or with EL

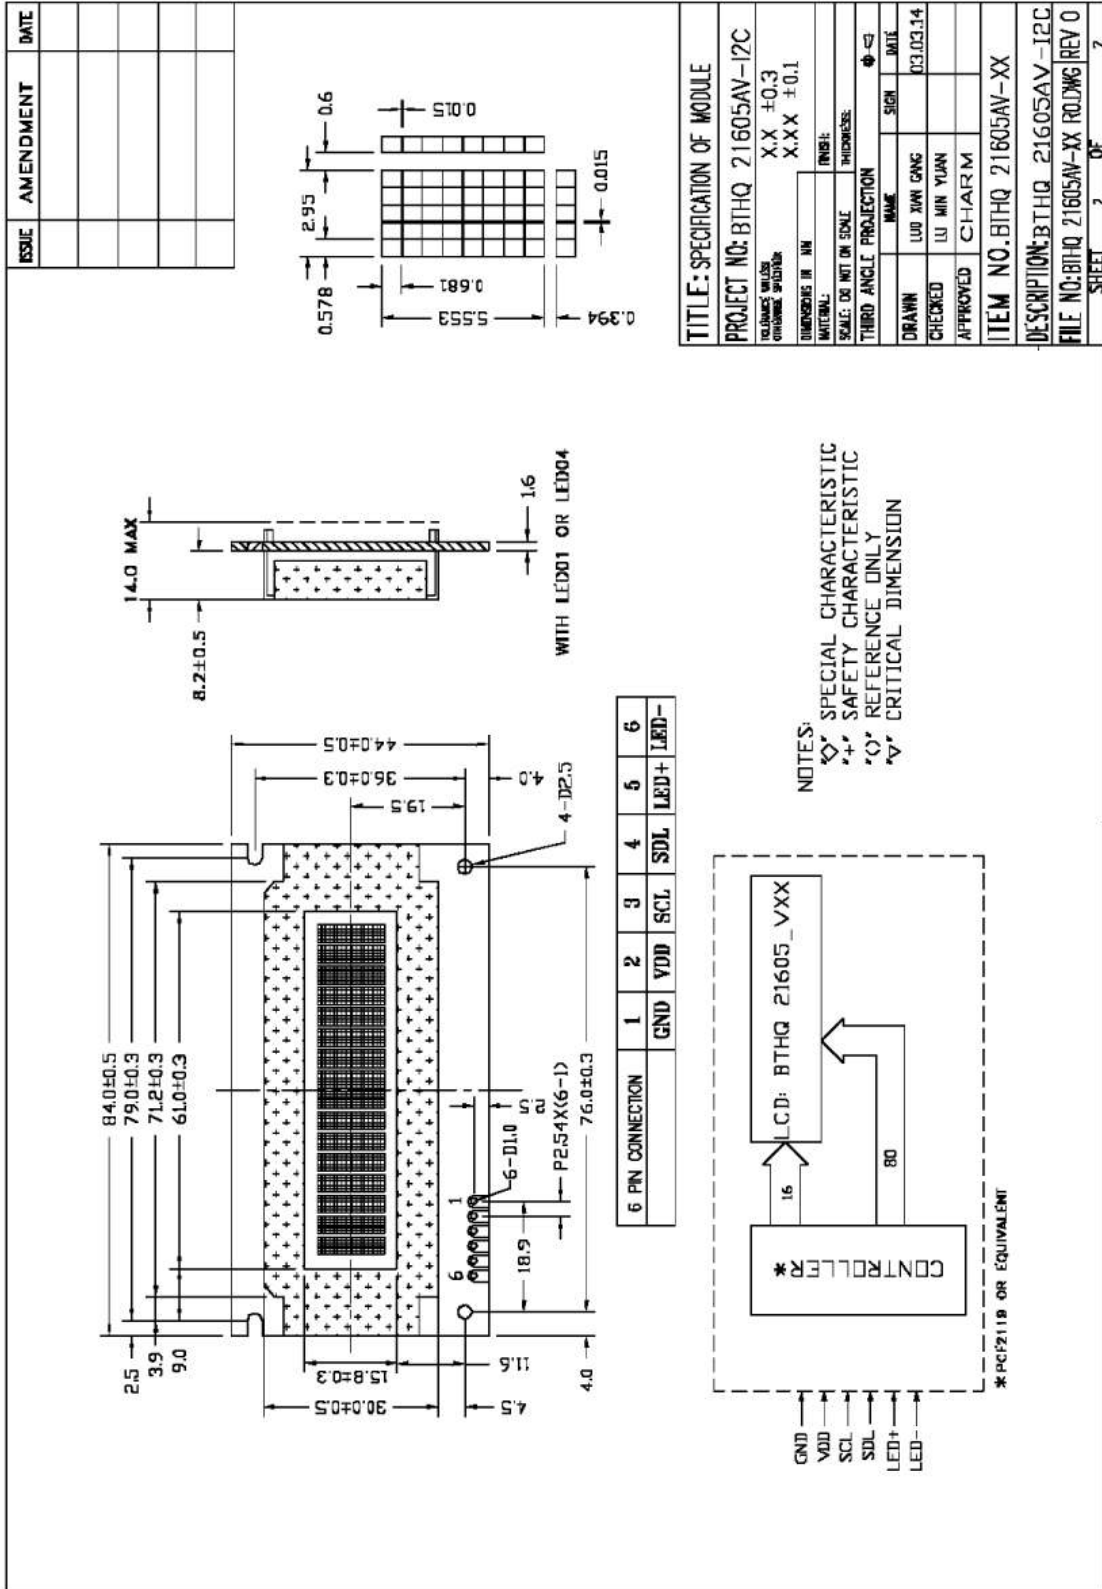


Figure 1(b): Specification Drawing with LED01 or LED04

3. Interface signals

Table 2

Pin No.	Symbol	Description
1	GND	Ground (0V)
2	VDD	Power supply for logic.
3	SCL	I ² C serial clock input
4	SDL	I ² C serial data input/output (SDA)
5	LED+	Anode of backlight.
6	LED-	Cathode of backlight.

4. Absolute Maximum Ratings

4.1 Electrical Maximum Ratings (Ta = 25 °C)

Table 3

Parameter	Symbol	Min.	Max.	Unit
Supply voltage range (Logic)	VDD-GND	-0.5	+6.5	V
Input voltage range (LCD)	V _{LCD}	-0.5	+7.5	V
Input voltage range	V _i	-0.5	VDD +0.5	V

Note:

The modules may be destroyed if they are used beyond the absolute maximum ratings.

All voltage values are referenced to GND = 0V.

4.2 Environmental Condition

Table 4

Item	Operating Temperature (T _{opr})		Storage Temperature (T _{stg})		Remark
	Min.	Max.	Min.	Max.	
Ambient Temperature	-20·C	+70·C	-30·C	+80·C	Dry
Humidity	95% max. RH for Ta ≤ 40·C < 95% RH for Ta > 40·C				no condensation
Vibration (IEC 68-2-6) cells must be mounted on a suitable connector	Frequency: 10 ~ 55 Hz Amplitude: 0.75 mm Duration: 20 cycles in each direction.				3 directions
Shock (IEC 68-2-27) Half-sine pulse shape	Pulse duration : 11 ms Peak acceleration: 981 m/s ² = 100g Number of shocks : 3 shocks in 3 mutually perpendicular axes.				3 directions

5. Electrical Specifications

5.1 Typical Electrical Characteristics

At $T_a = 25 \cdot C$, $V_{DD} = 5V$, 5%, $GND=0V$.

Table 5

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Operating voltage (Logic)	VDD-GND		4.75	5.0	5.25	V
Operating voltage for LCD (built-in)	VLCD-GND	Ta=-20 · C, Note1	-	4.4	-	V
		Ta=25 · C, Note1	4.0	4.3	4.6	V
		Ta=70 · C, Note1	-	3.8	-	V
Operating supply current	I _{DD}	Character mode, VDD =5.0V	-	1.1	1.8	mA
Input signal voltage low (SDA, SCL)	V _{il}		0	-	0.3 VDD	V
Input signal voltage high (SDA, SCL)	V _{ih}		0.7 VDD	-	5.5	V
Supply Voltage of yellow-green LED04 backlight	VLED04	Forward current =90mA No. of LED chips=2x9=18	3.9	4.1	4.3	V

Note (1): There is tolerance in optimum LCD driving voltage during production and it will be within the specified range.

5.2 Timing Specifications

$T_a = -20 \cdot C$ to $+70 \cdot C$, $V_{DD}=5V$, 5%, $GND=0V$; $V_{LCD}= 2.2V$ to $6.5V$.

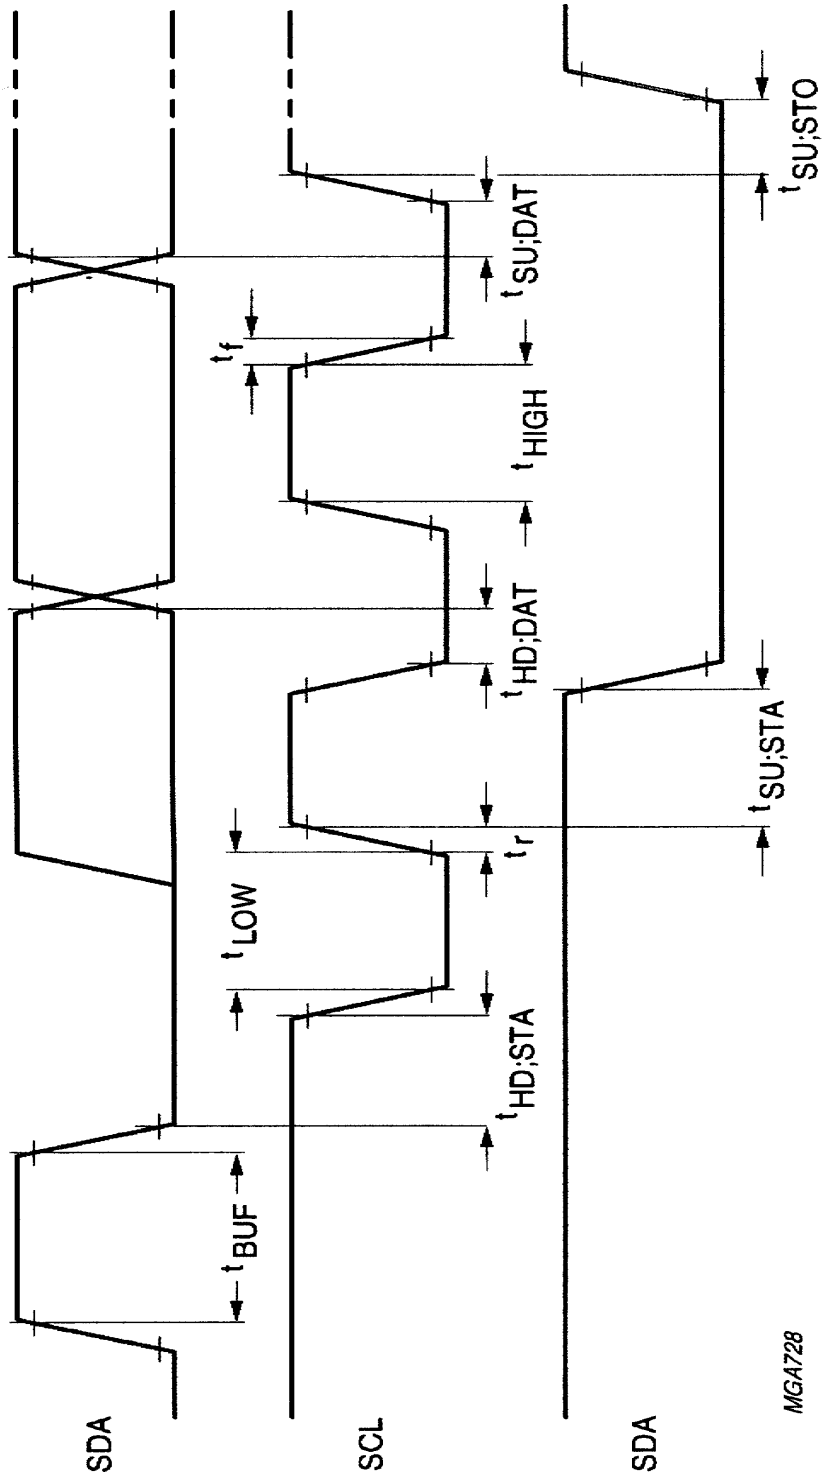
Refer to Fig.2, I²C Bus Timing Diagram of 'PHILIPS' PCF2119.

Table 6

Parameters	Symbol	Conditions	Min.	Typ.	Max.	Unit
LCD frame frequency (internal clock)	f_{FR}	$V_{DD}=5.0V$	45	95	147	Hz
Oscillator frequency(not available at any pin)	f_{OSC}		140	250	450	kHz
External clock frequency	$f_{OSC(ext)}$		140	-	450	kHz
Oscillator start-up time after power-down	t_{OSCST}	Note 3	-	200	300	ms
Reset and power down high level pulse width	$t_{W(R,PD)}$		1			ms
Tolerable spike width on PD and Reset pads	$t_{SW(R,PD)}$				90	ns
Timing characteristics: I²C-bus interface; (note 1)						
SCL clock frequency	f_{SCL}		-	-	400	kHz
SCL clock LOW period	t_{LOW}		1.3	-	-	ms
SCL clock HIGH period	t_{HIGH}		0.6	-	-	ms
Data set-up time	$t_{SU;DAT}$		100	-	-	ns
Data hold time	$t_{HD;DAT}$		0	-	-	ns
SCL and SDA rise time	t_r	Note 2,3	$15+0.1C_B$	-	300	ns
SCL and SDA fall time	t_f	Note 2,3	$15+0.1C_B$	-	300	ns
Capacitive bus line load	C_B		-	-	400	pF
Set-up time for a repeated START condition	$t_{SU;STA}$		0.6	-	-	ms
START condition hold time	$t_{HD;STA}$		0.6	-	-	ms
Set-up time for STOP condition	$t_{SU;STO}$		0.6	-	-	ms
Tolerable spike width on bus	t_{SW}		-	-	50	ns
Bus free time between STOP and START condition	t_{BUF}		1.3			ms

Notes :

1. All timing values are valid within the operating supply voltage and ambient temperature range and are referenced to V_{IL} and V_{IH} with an input voltage swing to GND to VDD.
2. C_B =total capacitance of one bus line in pF.
3. Tested on a sample.

Figure 2: I²C Bus Timing Diagram of 'PHILIPS' PCF2119.

6. Character Set 'R' in CGROM

upper 4 bits lower 4 bits	0000	0001	0010	0011	0100	0101	0110	0111	1000	1001	1010	1011	1100	1101	1110	1111
xxxx 0000	1	⦿	⦿	⦿	.	P	P	P	Q	Q	Q	Q	R	R	R	R
xxxx 0001	2	0	0	0	1	1	1	1	2	2	2	2	3	3	3	3
xxxx 0010	3	4	4	4	5	5	5	5	6	6	6	6	7	7	7	7
xxxx 0011	4	8	8	8	9	9	9	9	A	A	A	A	B	B	B	B
xxxx 0100	5	C	C	C	D	D	D	D	E	E	E	E	F	F	F	F
xxxx 0101	6	G	G	G	H	H	H	H	I	I	I	I	J	J	J	J
xxxx 0110	7	K	K	K	L	L	L	L	M	M	M	M	N	N	N	N
xxxx 0111	8	O	O	O	P	P	P	P	Q	Q	Q	Q	R	R	R	R
xxxx 1000	9	S	S	S	T	T	T	T	U	U	U	U	V	V	V	V
xxxx 1001	10	W	W	W	X	X	X	X	Y	Y	Y	Y	Z	Z	Z	Z
xxxx 1010	11	[[[]]]]	^	^	^	^	_	_	_	_
xxxx 1011	12	~	~	~	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣
xxxx 1100	13	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣
xxxx 1101	14	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣
xxxx 1110	15	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣
xxxx 1111	16	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣	␣

END -