

## Board-to-Wire Connectors Pitch 2.54 mm Series CV

Wafers for housing CV single row,  
angled



### SPECIFICATION:

Operating Voltage (Max.):	250 V
Operating Current (Nom.):	2.5 A
Operating Temperature:	-25°C to 85°C
Insulation Resistance (Min.):	1000 MΩ
Contact Resistance (Max.):	10 mΩ
Dielectric Strength:	1,000 Vac

### MATERIAL:






Material (Terminal):	copper alloy, tin plated
Material (Housing):	nylon 66
Flammability Class:	UL 94 V-2
Material (Contact Area):	brass, tin plated

### HANDLING:

Packaging:	bulk
------------	------

### TOLERANCE:

.X:	± 0.35
.XX:	± 0.25

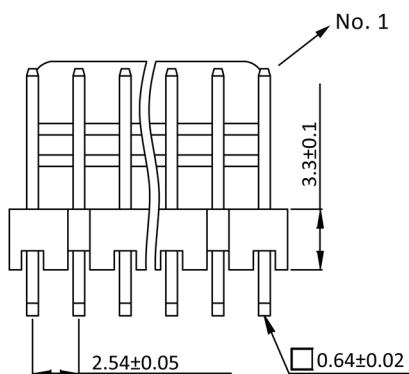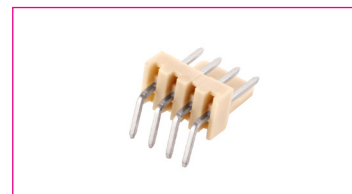

### Order Information

Identifier:	No. of Contacts:	Version:
PSL	#	W
Wafer series CV pitch 2.54 mm single row	2: 1 x 2	angled
	3: 1 x 3	
	4: 1 x 4	
	:	
	20: 1 x 20	