


CONFIDENTIAL

VERTRAULICH

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF MARQUARDT. WITHOUT THEIR CONSENT IT MAY NOT BE REPRODUCED OR GIVEN TO THIRD PARTIES.

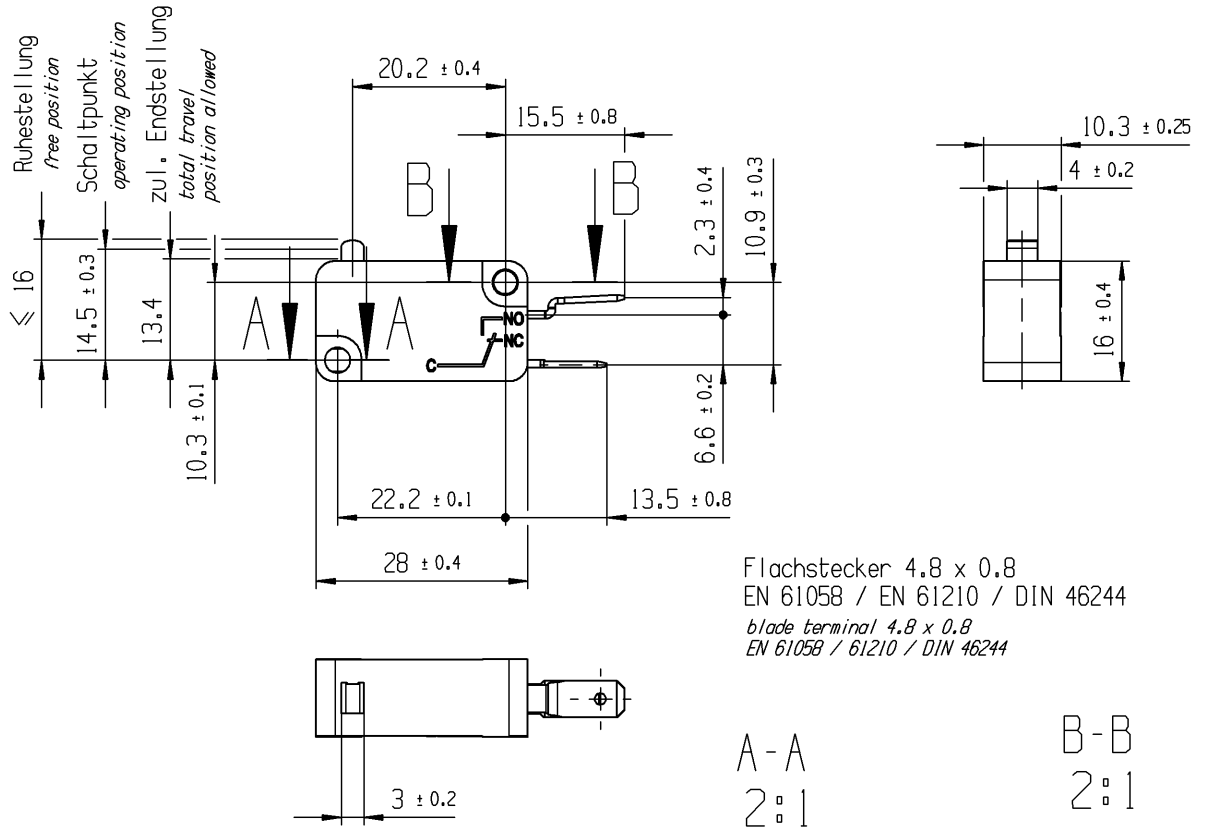

Flachstecker 4,8 x 0,8
 EN 61058 / EN 61210 / DIN 46244
 blade terminal 4,8 x 0,8
 EN 61058 / 61210 / DIN 46244


Aufschrift
 marking

1005
 10(6)A 250V AC 5EA T100



T.-Nr. 4664140

Herstellort /- jahr / -woche
 date code of manufacture:
 place / year / week



Schliesser 1-polig
 SPNO

Schalt-Betaetigungskraft 2.4 bis 3.8 N
 actuating force 2.4 up to 3.8 N

Differenzweg ≤ 1.2 mm
 movement differential

Schutzklasse nach DIN 40 050 IP 40
 protection class on DIN 40 050 IP 40

Alle Rechte bei Marquardt, auch fuer den Fall von Schutzrechtsanmeldungen. Jede Veruegungsbefugnis, wie Kopier- und Weitergaberecht, bei uns.

-		-		-		1005.2801-XX		
Figure		Type		Customer No.		Art.No.-PI		
General tolerances				Sheet 01		Ident.	Document number	
All dimensions are in millimetres	Shape and location ⊙ ≡	Angle ± 2 °	Edge tolerance 	Length	Radii	K	10052801	
				0-6	± 0.1			± 0.2
				>6-15	± 0.15			± 0.3
				>15-30	± 0.2			± 0.5
				>30-70	± 0.3			
>70-120	± 0.4	± 10%						
>120	± 0.8							
g	128297	2020-01-20		HHE		Snap action switch		
f	83050	2013-07-18		BRC				
e	28406	1999-11-19		PFU				
d	23880	1996-03-06		LM		MARQUARDT		
Index	MEC-No.	Date (YYYY-MM-DD)		Edited by				
				Format DIN A4		Projection 1:1		
				System NX V11.0				
				Replacement of Zg.gl.Nr.v.07.12.1995				