



Power Station VP330

Home backup power VP330 built-in rechargeable lithium batteries



Pure Sine Wave



High quality Lithium Battery



82500mAh Large Capacity



Multiple Output Ports

AC Pure Sine Wave Outputs

Pure sine wave has high conversion efficiency and small dissipation. The waveform is consistent with the Utility frequency, which can drive more loads and supply power to precision appliances without hurting the equipment, safe and secure to use.

5W Wireless Charger

While enjoying your favorite outdoor activities, you can charge your phone wirelessly by placing your phone on top of the power station. No need for USB charging cables!

USB QC3.0 & PD 18W Fast Charger

Powered by 18W USB output port and this power station has quick charging technology, getting your device charged to 80% in just 30 minutes.

UL certified Lithium Battery


Sufficient capacity, safety assurance, long service life.

Multiple Protections

Your unit comes with a BMS system which protects your devices from short circuiting, overvoltage, overloading, overcurrent, and undervoltage protection. You will never have to worry about your devices while charging with our power stations.

Power Station VP330

Home backup power VP330 built-in rechargeable lithium batteries

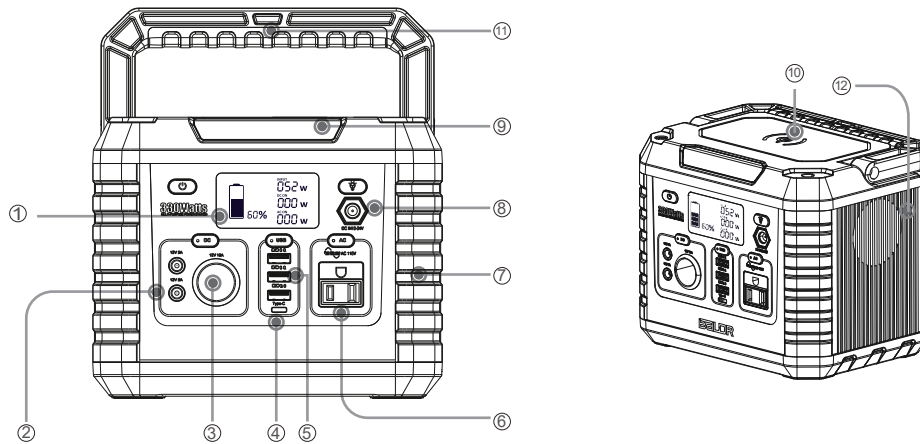

- ① LCD Screen Display
- ② DC Output
- ③ Cigarette Lighter Output
- ④ USB-C Output
- ⑤ USB-A Output
- ⑥ 330W Rated AC Output
- ⑦ Anti-collision Strip
- ⑧ DC Input
- ⑨ SOS MODE & LED light
- ⑩ Wireless Charger
- ⑪ Folding Handle
- ⑫ Air Intake Vent with Cooling Fan

Specifications

Capacity	297Wh (82500mAh / 3.6V)
Cell Type	18650
Cell Chemistry	Lithium-ion
Dimensions	L8"xW 6"xH6.5"(L204 x W154 x H164mm)
Weight	7.6 lbs (3.46 kg)
Life Expectancy	500 cycles to 85% capacity typical (depending on use and care)
Charging Time	Fully charged 5 to 7 hours
Shelf Life	Charge every 3 months (fully charged before storage)
Input, 8mm Charging Port	12-24V, up to 4A (Max 52W)
Output AC(Output, pure sine wave)	220V~240V 50Hz/60Hz
Output USB-A (x 3)	5V,9V,12V, up to 3A, (Max 54W total,with QC3.0 protocol)
Output USB-C (x 1)	5V,9V,12V, up to 3A, (Max 18W, without USB-PD protocol)
Output DC (x 2)	5521 type, 12V/5A
Output Cigarette lighter	12V/10A
Wireless Charger	5W
LED Light Power	2W
Operating / Storage Altitude	up to 6562 ft. (2000m)
Operating / Storage Maximum Humidity	up to 75% non-condensing
Operating Temp	14 to 104°F (-10 to 40°C)
Charging Temp	32 to 113°F (0 to 45°C)
Storage Temp	-4 to 113°F (-20 to 45°C)



Product	Power Station VP330
SKU	4PV-PSSBK1-NN
EAN Code	4713095608957
Packing Dimension (cm)	29.5 x 19.5 x 21
Weight (kg)	4

Verico International Co., Ltd.

12F-6., No.872, Zhongzheng Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.) Tel:+886-2-2221-0022 Fax:+886-2-2221-0033

Verico and Verico logo are registered by Verico International Co., Ltd. All other trademarks and logos are property of their respective owners. The appearance and specifications of all products are subject to change without notice.