




1 2 3 4 5 6 7 8 9 10 11 12 13 14

| Art.-Nr. | Länge / Length (mm) |
|----------|---------------------|
| 64992 | 500+30 |
| 64993 | 1000+30 |
| 64994 | 2000+30 |
| 64995 | 3000+30 |
| 64996 | 5000+50 |

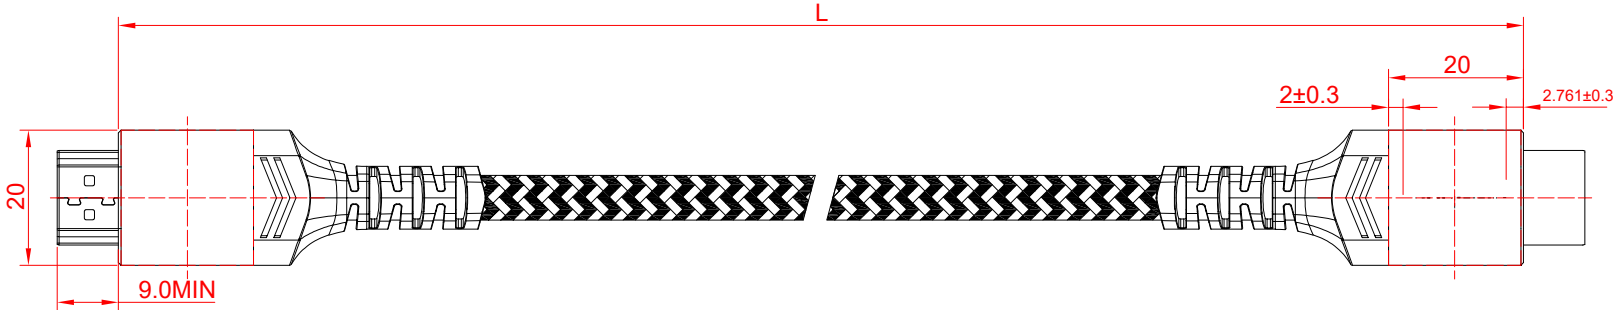

PIN-Zuordnung/PIN Assignment

| P1 HDMI AM | P2 HDMI AM |
|------------|------------|
| 1 | 1 |
| 3 | 3 |
| 5 | 5 |
| 4 | 4 |
| 6 | 6 |
| 2 | 2 |
| 7 | 7 |
| 9 | 9 |
| 11 | 11 |
| 10 | 10 |
| 12 | 12 |
| 8 | 8 |
| 14 | 14 |
| 19 | 19 |
| 17 | 17 |
| 13 | 13 |
| 15 | 15 |
| 16 | 16 |
| 18 | 18 |
| SHELL | SHELL |

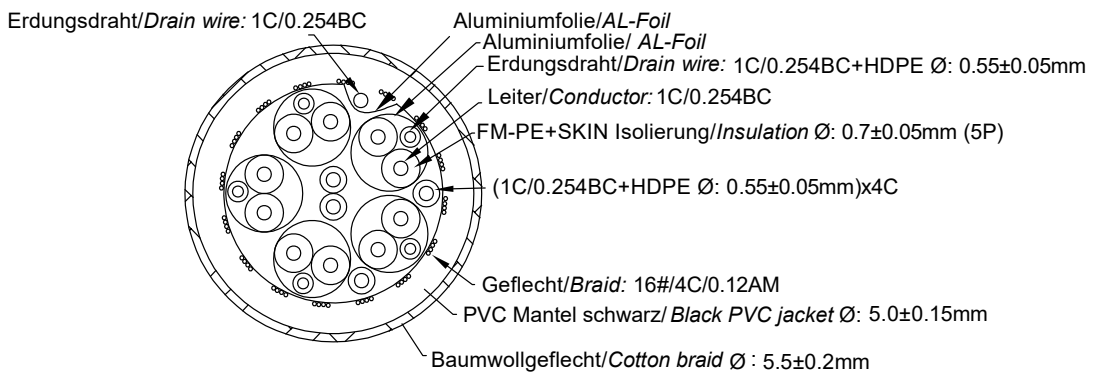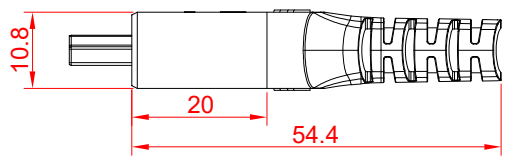

High-Speed-HDMI™-Kabel mit Ethernet (4K@60Hz)

- HDMI™-2.0 Kabel zur Audio- und Videoübertragung
- vergoldete Stecker beugen Korrosion vor und sind besonders langlebig

Anschluss 1: HDMI™-Stecker (Typ A)
 Anschluss 2: HDMI™-Stecker (Typ A)
 Knickschutz: ja
 Kabeltyp: Rundkabel
 Max. Übertragungsrate: 18 Gbit/s

High Speed HDMI™ Cable with Ethernet (4K@60Hz)

- HDMI™ 2.0 cable for audio and video transmission
- gold-plated plugs prevent corrosion and are especially durable

Connection 1: HDMI™-plug (Type A)
 Connection 2: HDMI™-plug (Type A)
 Kink protection: yes
 Cable type: round cable
 Max. data transmission rate: 18 Gbit/s

| Änderungen | | Datum | Name | Bezeichnung | Blatt |
|--|------|-------------------|------|-----------------------------------|-------|
| Datum | Name | gez.: 17.01.2024 | alw | HDMI 2.0 Kabel G+ XXXX X, XM | 1/1 |
| | | gepr.: 17.01.2024 | tp | | |
| | | Norm: | | Zeichnungs-Nr.: | von |
| Änderungen vorbehalten / Subject to change | | | | 64992, 64993, 64994, 64995, 64996 | |



1 2 3 4 5 6 7 8 9 10 11 12 13 14