

SPECIFICATION:

Operating Current (Nom.): 1 A
 Operating Temperature: -40°C to 105°C
 Insulation Resistance (Min.): 1000 MΩ
 Contact Resistance (Max.): 15 mΩ
 Dielectric Strength: 500 Vac

MATERIAL:




Material (Terminal): brass
 Material (Housing): PBT
 Flammability Class: UL 94 V-0
 Material (Contact Area): bronze, gold plated

HANDLING:

Packaging: tray

TOLERANCE:

.X: ± 0.15
 .XX: ± 0.10

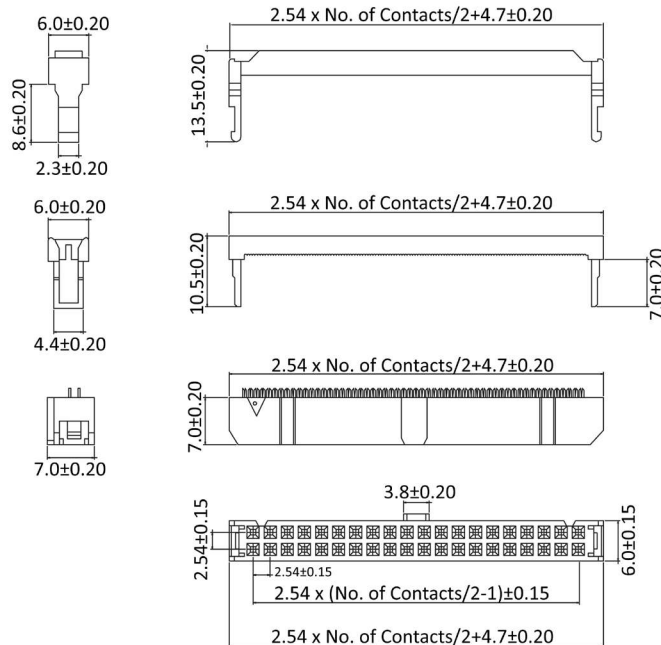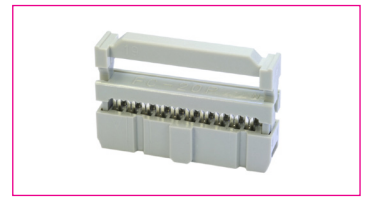

Order Information

Identifier:	No. of Contacts:	Colour:
PV	#	#
IDC socket pitch 2.54 mm	6: 2 x 3	empty: black
	8: 2 x 4	GR: grey
	10: 2 x 5	
	14: 2 x 7	
	16: 2 x 8	
	20: 2 x 10	
	24: 2 x 12	
	26: 2 x 13	
	34: 2 x 17	
	40: 2 x 20	
	50: 2 x 25	
	60: 2 x 30	
	64: 2 x 32	