


LIMITS	CLASS			
	A	B	C	D
0~10	±0.02	±0.05	±0.10	±0.15
10以上~50	±0.05	±0.10	±0.15	±0.20
50以上~120	±0.10	±0.15	±0.20	±0.25
120以上~300	±0.15	±0.20	±0.25	±0.30
300以上~500	±0.20	±0.25	±0.30	±0.35
500以上~1000	±0.25	±0.30	±0.35	±0.40
1000以上~1500	±0.30	±0.35	±0.40	±0.45
ANGEL	±0.2°	±0.5°	±1.0°	±1.5°

ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	2011.09.30	zeng yang

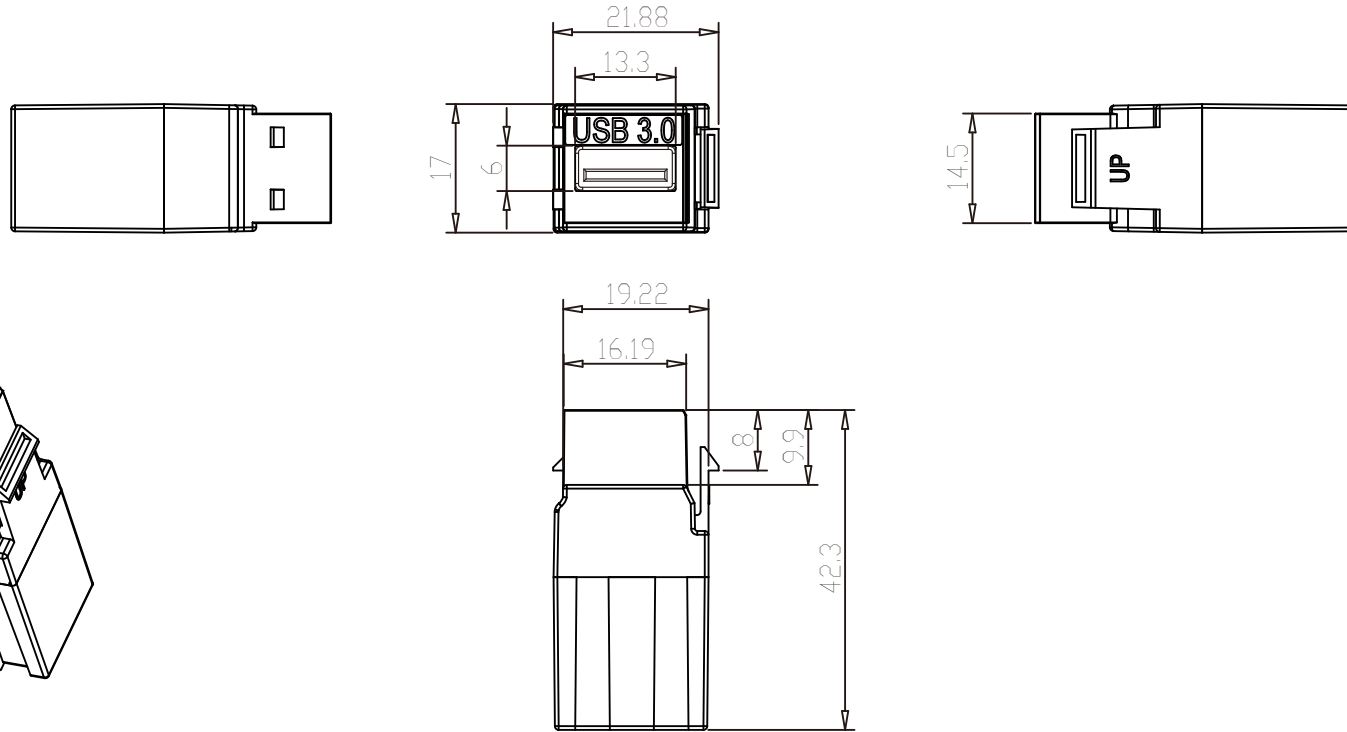

ELECTRICAL:

- HIGH VOLTAGE TEST: DC/300V
- INSULATION RESISTANCE: <math><20\text{ M}\Omega</math>
- CONTACT RESISTANCE: <math><2\Omega</math>
- OPERATING TEMPERATURE: -20~50°C
- STORAGE TEMPERATURE: -40~70°C
- 1u" Gold Plating

MECHANICAL

- Materials: UV stabilized PC+ABS

MODEL: EB537	TITLE: USB3.0(A)to(A)module				
DRAWN: zeng yang	PART NO.			UNIT	mm
DESIGNED:	MATERIAL			SCALE	None
CHECKED: JACK 9/28-2011	FINISH			SHEET	1 OF 1
	TOOLING NO.			SIZE	A4
APPROVED:	DWG NO.			REV.	A