

PC C 65 G



Sample image

Order symbol : PC C 65 G

Product nr : 8724305

UL Code : 8714305

UL Name : UL PC C 65 G

Description : Enclosure, PC


Remarks : Grey cover

EAN : 6418074002037

El. number :

- Finland : 3423405
- Denmark : 8212001514
- Sweden : 2536807

Including : Base with screws for mounting plate/DIN-rail. cover with PUR gasket and polyamide cover screws.

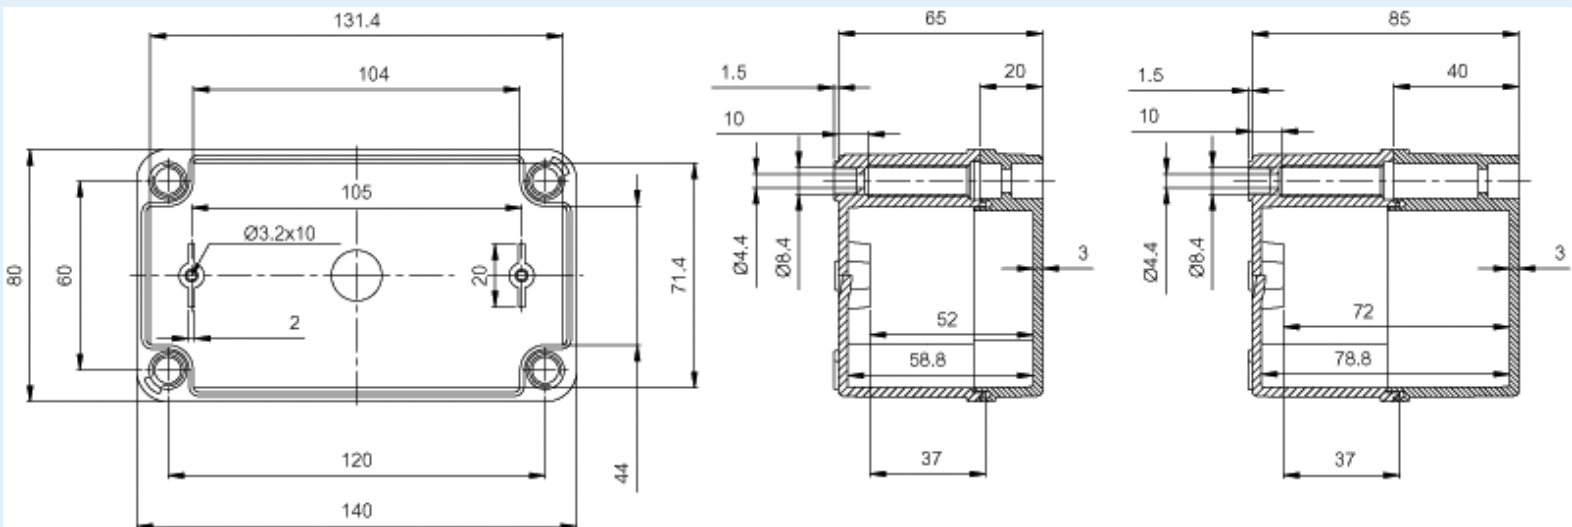

Dimensions :	Height	Width	Depth
mm :	140	80	65
inch :	5.51	3.15	2.56

Materials :

Accessories :

- C-MP Mounting plate, for enclosures: (110 x 54 x 1)
- FP 22040 Wall fastening lug (2 pcs), for enclosures:
- CHM-3 DIN-35 Mounting rail, for enclosures: (110 x 35 x 1)

Material :	Polycarbonate
Base colour :	RAL 7035 -light grey
Cover colour :	RAL 7035 -light grey
Gasket material :	Polyurethane

Temperatures :

Temperature °C (short term) :	-40 ... 120
Temperature °C (continuous) :	
Temperature °F (short term) :	-40 ... 250
Temperature °F (continuous) :	-40 ... 175

Rating :

Ingress protection (EN 60529):	IP66; IP67;
Impact Resistance (EN 62262):	IK08;
Electrical insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815):	1
UV resistance :	UL 508
Flammability Rating :	UL 746C 5"
Glow Wire Test (IEC 695-2-1) °C :	960 °C
NEMA Class	

Certificates :

SGSFIMKO_PICC_pc